

CECHCEC FREE FEXNIMEEN FREI FEXNIMEE


climasol®

Side insulation and expansion joints

climasol® side insulation prevents heat losses and transmission of impact noises via the walls.

climasol® as side expansion joint prevents the contact between walls and the floating floor system of f.i. a floor heating system.

climasol® side insulation strips of closed cell polyethylene foam don't absorb moisture.

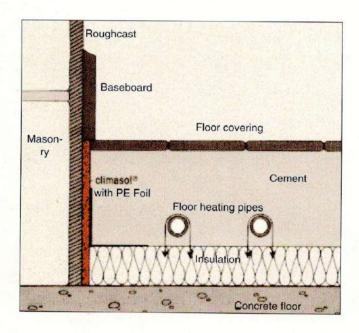

How to use?

Thanks to its flexibility **climasol®** can be installed without any problem also in corners. After the drying of the cement the exposed part is simply cut off.

NMC sa reserves the right to change or modify any of the technical data or size range of its products without prior notice. The technical data contained in this brochure has been obtained under specific test conditions and the correct application of our products is the responsibility of the user.

Technical data

Structure	closed cell polyethylene foam
Production	CFC and HCFC free (ODP = 0)
Density	± 25 kg/m³
Water absorption	< 0,5 % (DIN 53 495)
Temperature resistance	-40°C to +100°C
Fire resistance	B2 (DIN 4102)
Sound absorption	33 dB (DIN 52 210)
Dynamic stiffness	< 150 MN/m³ (DIN 52 214)

Product range

Standard supply form

thickness: 8 mm

height: 150 mm/180 mm

roll length: 25 m

Standard reference (FSR TYPE) is supplied with PEfoil perforated the entire length 1 cm from the top to enable easy tearing of the overhanging part.

Other versions on demand.



For more information and samples, please contact the address below or your local distributor.

Distributed b	v:
---------------	----

nmc (uk) ltd - nomafoam

Prospect Road, Beechburn Industrial Estate, Crook, Co. Durham DL15 8JN Tel.: 01388 761300 • Fax: 01388 761400 Customer Service Department direct lines Tel.: 01388 761444 • Fax: 01388 761445 e-mail: enquiries@nmc-uk.com

n m c



Rovert 10
B-4731 Raeren/Eynatten (Belgium)
Tel.: +32 87 85 85 00
Fax: +32 87 85 85 11
e-mail: info@nmc.be

Internet : http : //www.nmc.be

