


## Product Data Sheet (2020-04-29)

### Flexvent Super

The compact, proven design has high efficiency and guaranteed operation for heating and air conditioning.

The water within the installation contains air which can form corrosion and reduce the thermal transfer. A Flexvent is fitted at places where the air collects.

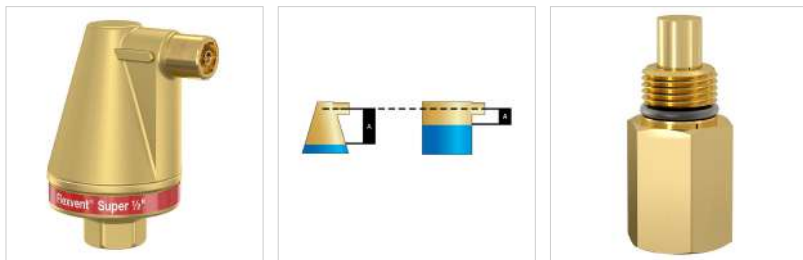

Type	Dimensions		Connection	Shut-off valve	###	Order Code
	Ø [mm]	H. [mm]				
Flexvent Super 1/2	73	119	G 1/2" F	no	1	28520
Shut-off valve Flexvent Super	-	-	1/2"	-	1	28525

### Advantages

- The cap of the Flexvent Super is conical in shape. The advantage of this construction is that the clearance between the water level and venting valve is maximized.
- The air escape duct can be opened or closed with an adjusting screw.
- The venting valve forms an integral part of the cap, so that it is impossible to damage the float vent mechanism from outside.

### Technical information

- Minimum/Maximum working temperature: -10 °C / 120 °C.
- Minimum/Maximum working pressure: 0.2 / 10.0 bar.
- Suitable for addition of glycol-based anti-freeze up to 50%.

### Find more information online:

[Manuals](#)

[Certificates](#)

[CAD drawings](#)

[Extra documentation](#)

Flamco Limited  
Washway Lane  
WA10 6PB, St Helens, Merseyside - gb  
**T** 017 447 447 44  
**F** 017 447 447 00  
**E** [info@flamco.co.uk](mailto:info@flamco.co.uk)  
**I** [flamcogroup.com/uk-en](http://flamcogroup.com/uk-en)